

Stanton



Tools Needed:

7/16" Wrench or Socket

Phillips Screwdriver or Drill Bit ¹ 

Sharp Cutting Tool ² 




1. Only needed on styles that have legs attached with phillip screws.


2. Only needed if bottom cloth is difficult to take off

Information


This guide is a general overview of how to take our product apart for easier transport. These steps will work with many of our styles, however, actual style will vary slightly from the images in this guide

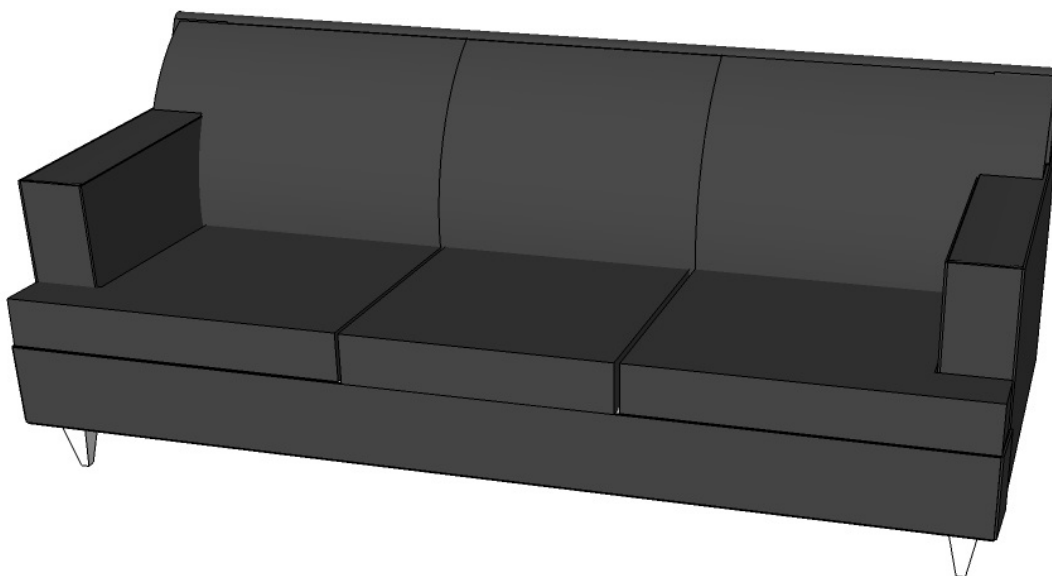

Step 1: Remove Cushions

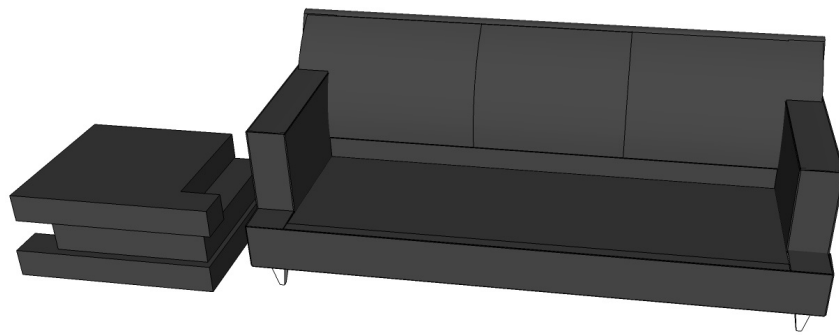

Step 2: Flip on Back

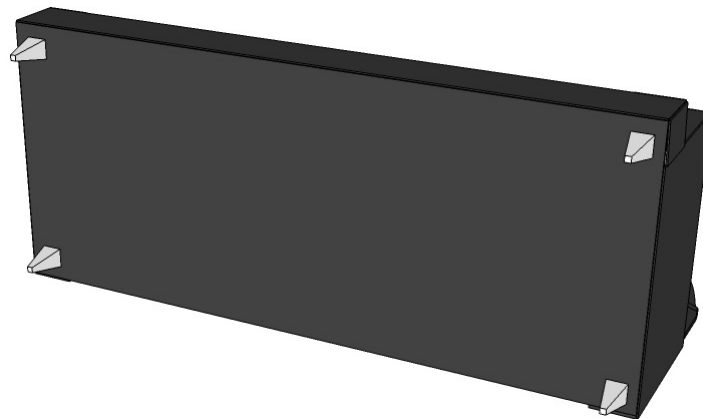


Step 3: Remove Legs



i If screws are present on legs, a phillips is needed, otherwise, twist leg counterclockwise


Step 4: Remove Bottom Cloth

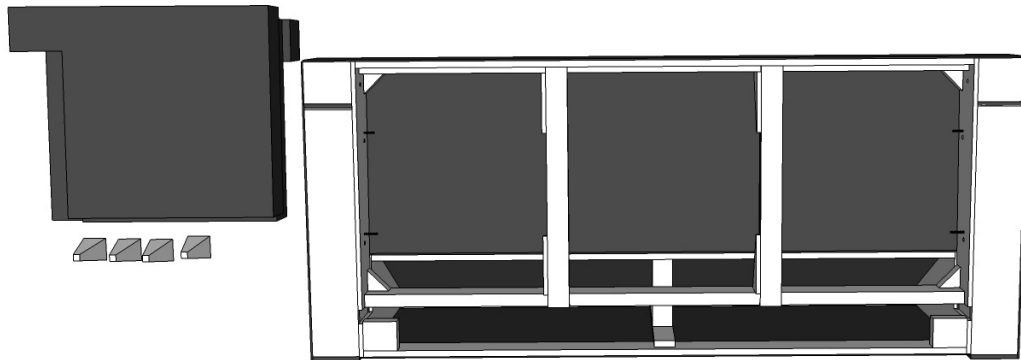

A cutting tool may be needed if bottom cloth cannot be removed by hand


Replacement cloth may be requested

Step 5: Remove Back and Seat Nuts of One Side

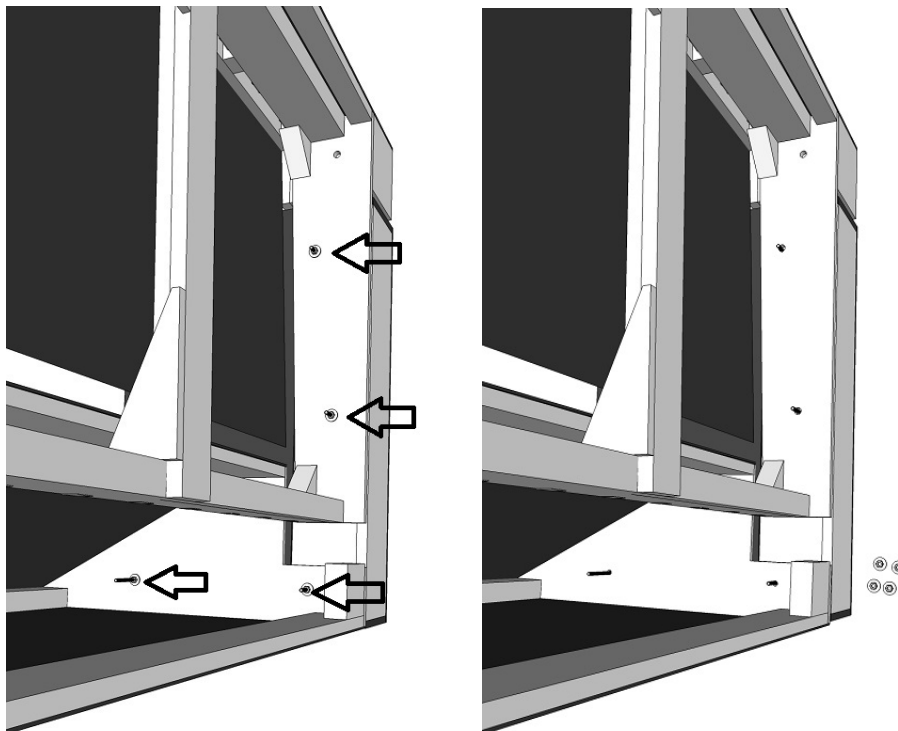


*7/16" socket or wrench needed for this step. **Leave arm In place***

Step 6: Remove Seat Nuts of Opposite Side

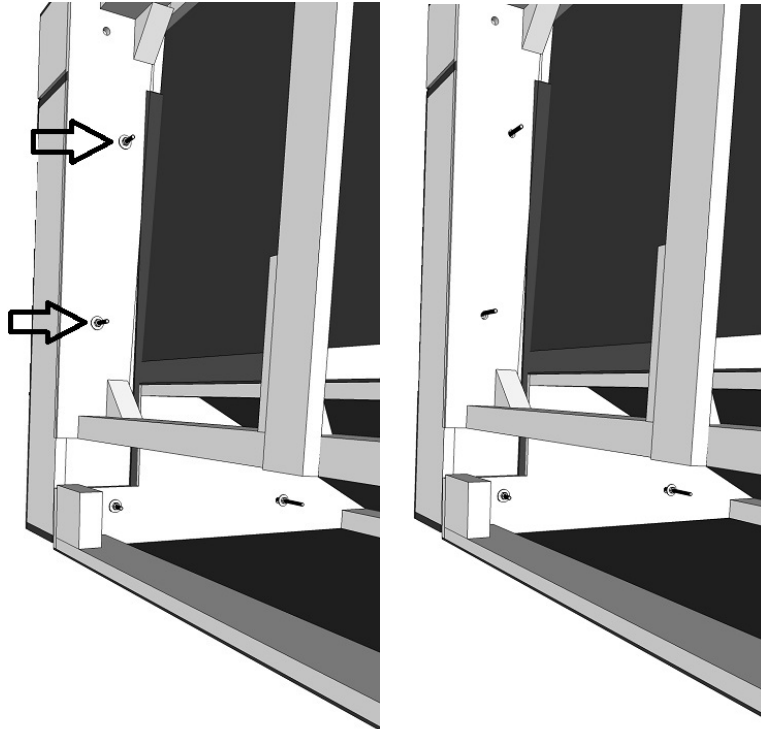


i 7/16" socket or wrench needed for this step.


Step 6: Remove Arm

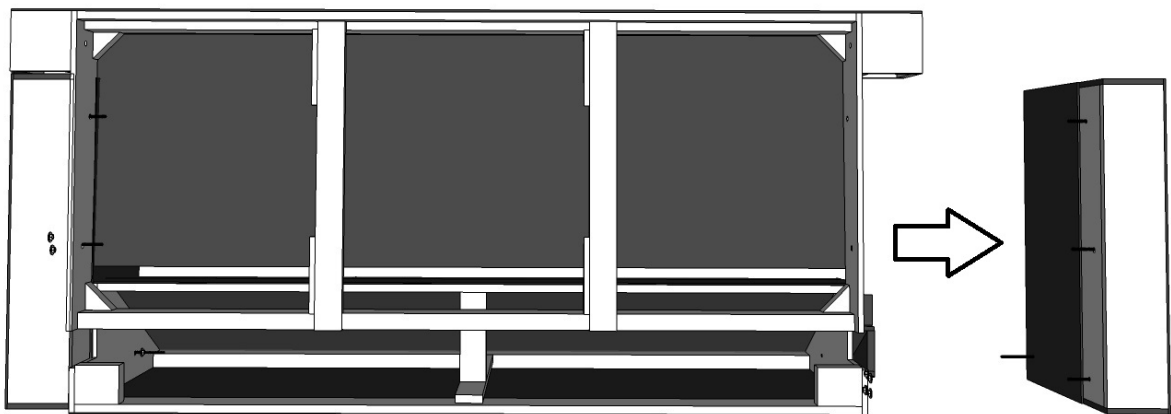

Step 7: Remove Seat

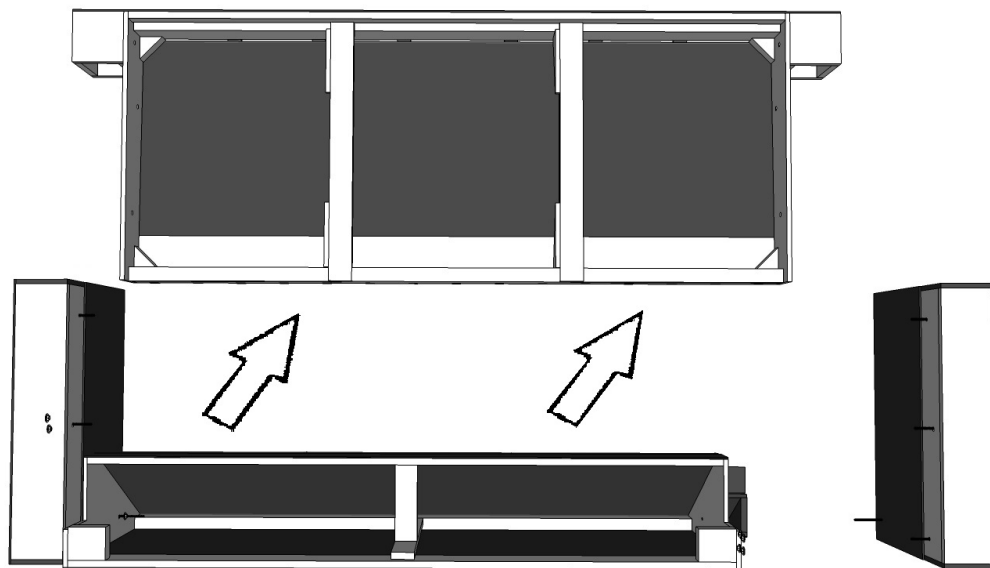


Step 8: Remove Nuts of Inside Back

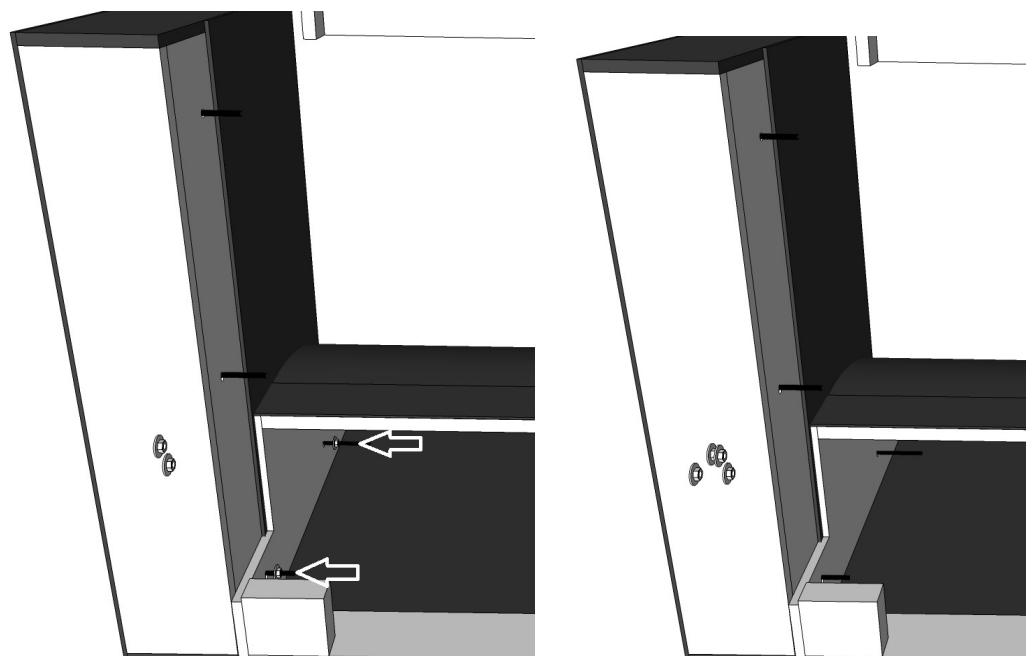

i *7/16" socket or wrench needed for this step.*

Step 9: Remove Final Arm

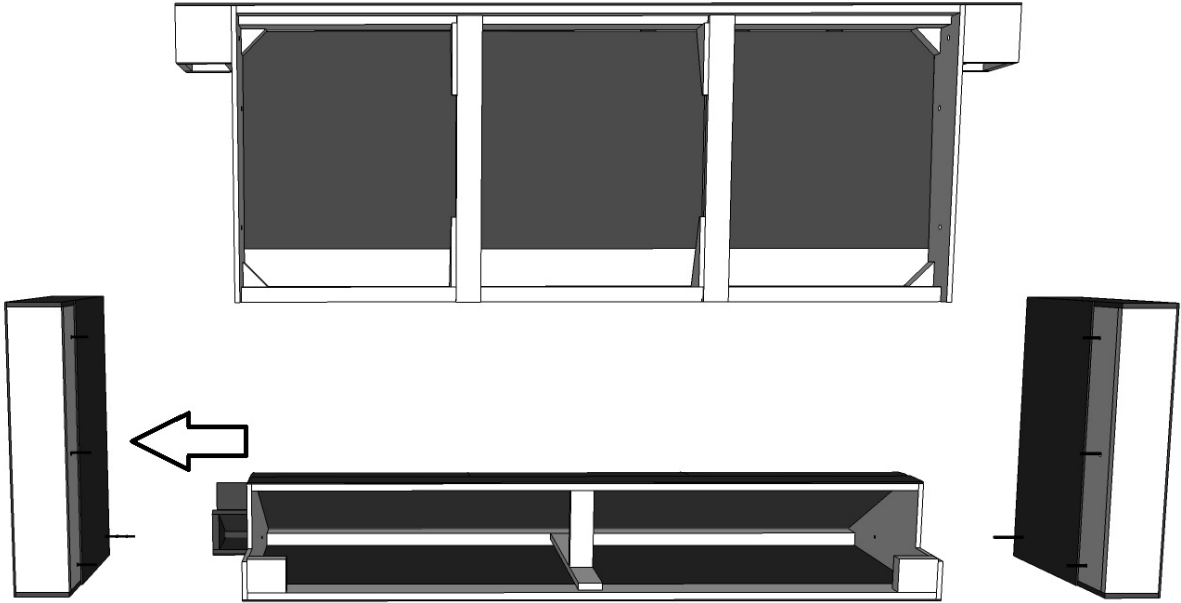

Complete

